


RC410AS7-A80C

ATI Radeon® Xpress 200

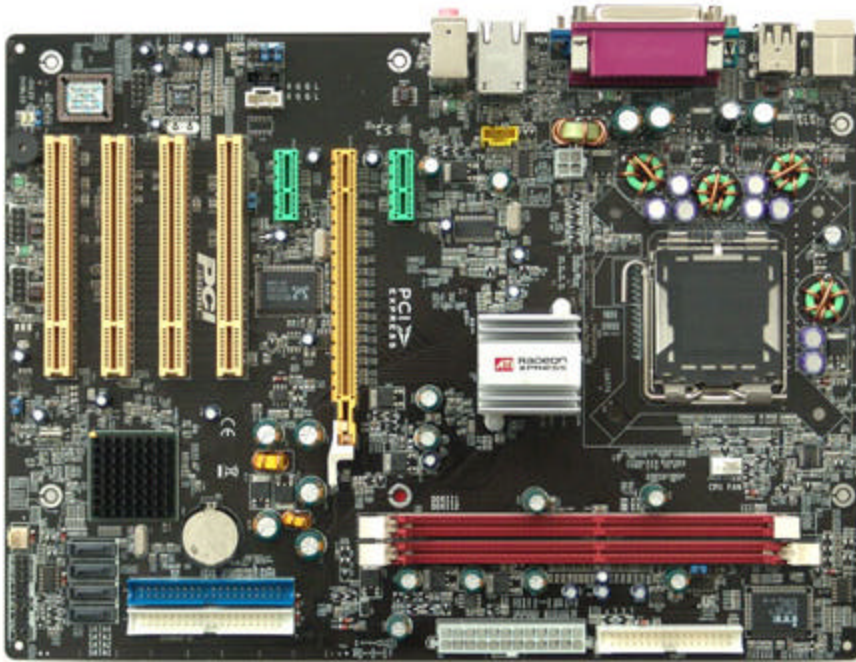

ATI RADEON XPRESS 200

Specification : -

Processor

- Intel® Pentium® 4(LGA775 Socket) (533/800/1066MHz FSB) (HT Support)

Chip Set

- ATI® RC410 + SB450

BIOS

- Phoenix (Award) PnP Flash ROM BIOS

Memory

- Two DDRII Sockets Supports up to 2GB (DDRII -667)

Expansion Slot

- Two PCI-E x1 Slot
- Four PCI Slots

Graphic Interface

- One PCIE x16 Slot

Graphics (X300 DirectX 9.0 core)

- Integrated 128-bit 3D/2D Graphics Engines with DirectX 9.0 hardware support.
- Hardware Motion Compensation and iDCT & Hardware MPEG2 Decode (DVD).
- Max. 128MB Frame Buffer Shared with System Memory.
- Integrated 24-bit 350MHz RAMDAC.
- Integrated TV Encoder, Macrovision Support, Composite and S-Video Out (Via Cable Adapter), Pal & NTSC Support.
- Surround View Supported with ATI RADEON PCIE Card

Audio

- Integrated AC97 Controller with Standard AC97 Codec
- 6 Channel Audio Codec Support

Lan

- Optional 10/100 Mb/s Lan (Realtek)

USB 2.0

- Integrated in chipset, USB2.0 x 8

IDE & Serial ATA

- Integrated ATA133 and Serial ATA Controller w/RAID support

Storage & IO Connector

- Two Channels Parallel ATA133 Connector (Support up to 4 Devices)
- Four Serial ATA Ports
- One FDD Port (Support 1.44/2.88 MB FDD)
- One Audio Port (Line-in, Line-out, MIC-in)
- One PS/2 Mouse Port
- One PS/2 Keyboard Port
- One Parallel Port
- One Serial Port
- One VGA Port
- Four USB Ports on Back Panel, four USB on Header with Optional Cable
- One RJ45 Port
- One SPDIF Out (Digital Sound)

Optional HW Monitoring

- CPU & System Overheat Protection

Software

- PC-cillin 2004 Anti Virus

Board Size

- 305mm x 244mm, ATX Form Factor